

NEW
LOW
PROFILE,
REDUNDANT
HOT-SWAP
POWER
SUPPLIES
FROM
KEPCO

The HSF-1U series will mount up to four 50 or 100 Watt modules in a 1.75" rack adapter, RA 19-1U. Single output modules from 5 Volts to 48 Volts are available.

CE HSF-1U are CE marked per the Low Voltage Directive (LVD), EN60950



Four HSF modules shown in RA 19-1U Housing



Rear View

HSF 1U MODEL TABLE

MODEL	OUTPUT VOLTS	ADJUSTMENT RANGE	OVP SETTING (VOLTS)	OUTPUT CURRENT AMPS 0-40°C	CURRENT ⁽¹⁾ LIMIT (AMPS)	SW RIPPLE mV		NOISE (spike) mV max
						typ	max	
50 WATT MODELS								
HSF 5-10-1U	5	4.5-5.5	6.5~7.5	0-10.0	10.5~12.0	30	60	<120
HSF 12-4.2-1U	12	11.4-12.6	13.7~15.7	0-4.2	4.4~5.1	35	70	<190
HSF 15-3.4-1U	15	13.5-16.5	17.0~19.0	0-3.4	3.6~4.1	45	90	<220
HSF 24-2.1-1U	24	22.5-25.5	27.0~30.5	0-2.1	2.2~2.6	50	100	<310
HSF 48-1-1U	48	45.0-51.0	53.5~60.0	0-1	1.1~1.3	60	150	<350
100 WATT MODELS								
HSF 5-20-1U	5	4.5-5.5	6.5~7.5	0-20	21.0~24.0	30	65	<120
HSF 12-8.3-1U	12	11.4-12.6	13.7~15.7	0-8.3	8.7~10.0	35	70	<190
HSF 15-6.6-1U	15	13.5-16.5	17.0~19.0	0-6.6	7.0~8.0	40	80	<220
HSF 24-4.2-1U	24	22.5-25.5	27.0~30.5	0-4.2	4.4~5.2	50	110	<310
HSF 28-3.5-1U	28	26.5-29.5	32.0~35.0	0-3.5	3.7~4.2	60	140	<330
HSF 48-2-1U	48	45.0-51.0	53.5~60.0	0-2	2.1~2.4	80	220	<530

HSF GENERAL SPECIFICATIONS

SPECIFICATION	RATING/DESCRIPTION		CONDITION
	50W	100W	
Temperature	0 to 71°C, See Figure 1		Operating
	-40°C to +85°C		Storage
Humidity	Up to 95% RH		Non-condensing Operating & storage
Shock	20g, 3 axes (11 msec ±5msec pulse duration)		Non-operating 3 shocks each axis
Vibration	6-10Hz: 10mm amplitude 3 axes		Non-operating 1 hour each axis
	10-55Hz: 2g, 3 axes		
Isolation Output-Case	500V d-c, 100M Ohm		25°C, 65% RH
Type of Construction	Plug-in		
Cooling	Convection		
Withstand Voltage 50W	Input-Output	3.75KV a-c for 1 minute	25°C, 65% RH Y caps removed
	Input-Case	3KV a-c for 1 minute	
Safety	2KV a-c for 1 minute		UL 1950, EN60950, CSA 222 No. 950-5
	UL 1950, EN60950, CSA 222 No. 950-5		
Bellcore Requirements	NEBS GR-63-CORE		Designed to meet


HSF INPUT CHARACTERISTICS

SPECIFICATION	RATING		CONDITION
	50W, 100W	50W, 100W	
a-c Voltage	rated nominal	100/120/220/240V a-c	
	min-max range	95-264V a-c	
Power Factor	—		—
d-c Voltage	min-max range	125-370V d-c ⁽¹⁾	
Brown-out Voltage	min	85V a-c 110V d-c	
		Polarity insensitive	
Frequency		50-60Hz 47-440Hz ⁽²⁾	
EMI		FCC and VDE 0871	
Soft-start Circuit		Conducted Class B	
Leakage Current	max	Thermistor or thyristor limiter	
Start-up Time	max	0.5mA UL method	
		120V a-c 50-60Hz	
Holdup Time	max	07.5mA VDE method	
		240V a-c 50-60Hz	
INPUT CURRENT (Amperes)	typ	50W < 500ms	
		100W < 200ms	
Fuse Value	typ	20msec	
	min	15msec	
Initial Turn-on Surge, First Half Cycle	typ	120V a-c	
		100V a-c	
Efficiency	typ	45A	
		90A	
Switching Frequency	typ	76%	
		Max load, nominal output	
		120KHz	
		Main converter, forward PFC converter	

Each HSF-1U plug-in power supply is equipped with a power on/off, indicator LEDs and voltage test points.




The RA 19-1U provides access to the DIP switches and rack keying without disassembling the rack. It also provides a redundant scheme with modules 1 and 3 being powered from one a-c input and modules 2 and 4 from a second a-c input. Module numbering is left to right facing the front panel.

FIGURE 1
Output Power Rating vs. Ambient Temperature

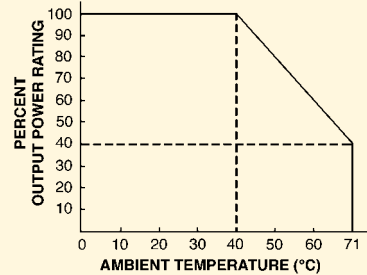

OUTLINE DIMENSIONAL DRAWINGS

Fractional dimensions in light face type are in inches,
dimensions in bold face type are in millimeters.
Tolerance: ± 1/64" (0.4) between mounting holes,
± 1/32" (0.8) other dimensions

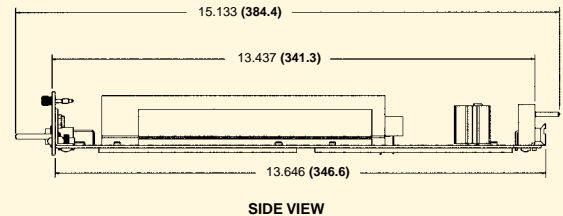

For more information visit the Kepco Website:
www.kepcopower.com/hsf.htm



Kepco, Inc.: 131-38 Sanford Avenue, Flushing, NY 11352 USA
Tel: (718) 461-7000 • Fax: (718) 767-1102
E-Mail: hq@kepcopower.com • www.kepcopower.com

(1) Note: Safety agency approvals are valid only for a-c input because of the fuse rating.
(2) At 440Hz the leakage current exceeds the UL safety specification.