

■ Features :


- Green design, No-load power consumption < 0.3W
- Universal AC input / Full range
- Protections: Short circuit / Over load / Over voltage Brown-out ( Low AC Input voltage )
- Medical safety approved
- Fully isolated plastic case
- Isolation class II
- All using 105°C long life electrolytic capacitors
- High operation temperature up to 70°C
- 100% full load burn-in test
- Withstand 2G vibration test
- Cooling by free air convection
- 3 years warranty




|              | MODEL  | ME-05-05   | ME-05-12   | ME-05-15  | ME-05-24  |
|--------------|--|--|--|-----------|-----------|
| OUTPUT       | DC Voltage Range   | 5V   | 12V  | 15V       | 24V       |
|              | Rated Current  | 1A   | 0.42A  | 0.33A     | 0.21A     |
|              | Current Range  | 0 ~ 1A   | 0 ~ 0.42A  | 0 ~ 0.33A | 0 ~ 0.21A |
|              | Rated Power  | 5W   | 5.04W  | 4.95W     | 5.04W     |
|              | Ripple & Noise (max.)  | 100 mv   | 150 mv   | 150 mv    | 240 mv    |
|              | Voltage Tolerance  | +5 / -3%   |  |           |           |
|              | Line Regulation  | Note.8 ±0.5%   |  |           |           |
|              | Load Regulation  | Note.8 ±1.0%   | ±0.5%  | ±0.5%     | ±0.5%     |
|              | Setup, Rise Time   | 100ms, 25ms/230VAC   | 100ms, 25ms/115VAC at full load  |           |           |
| INPUT        | Hold Up Time   | 100ms / 230VAC   | 25ms / 115VAC at full load   |           |           |
|              | Voltage Range  | 85V ~ 264VAC   | 125 ~ 373VDC   |           |           |
|              | Frequency Range  | 47Hz ~ 63Hz  |  |           |           |
|              | Efficiency (Typ.) at 230Vac  | 71%  | 75%  | 75%       | 77%       |
|              | AC Current (Typ.)  | 0.13 A / 115VAC  | 0.08A / 230VAC   |           |           |
| Protection   | Inrush Current (Typ.)  | Cold Start 25A / 115VAC  | 45A / 230VAC   |           |           |
|              | Over Load  | Above 110% rated output power  | Protection type : Hiccup mode, recovers automatically after fault condition is removed |           |           |
|              | Over Voltage   | 115% ~ 145% rated output voltage   | Protection type : latch-off mode   |           |           |
| Environment  | Working Temp.  | -20°C ~ 70°C (Refer to output load de-rating curve)                                    |  |           |           |
|              | Working Humidity   | 20 ~ 90% RH non-condensing   |  |           |           |
|              | Storage Temp., Humidity  | -40 ~ +85°C, 10 ~ 95% R.H  |  |           |           |
|              | Temp.Coefficient   | ±0.03%/°C (0 ~ 50°C)   |  |           |           |
|              | Vibration  | 10 ~ 500Hz, 2G 10min/1cycle, period for 60 min each along X,Y,Z axes                   |  |           |           |
| Safety & EMC | Safety Standards   | UL60601-1 / TUV EN60601-1 / IEC60601-1 Approved  |  |           |           |
|              | Withstand Voltage  | I/P - O/P: 4KVAC   |  |           |           |
|              | Isolation Resistance   | I/P - O/P : 100M Ohms / 500VDC   |  |           |           |
|              | EMI Conduction & Radiation   | EN55011: 2007+A2: 2007 Class B   |  |           |           |
|              | Harmonic Current   | EN61000-3-2: 2006 Class A, EN61000-3-3: 1995+A1; 2001+A2: 2005                         |  |           |           |
| Others       | EMS Immunity   | EN60601-1-2: 2001+A1: 2006, IEC61000-4-2,3,4,5,6,8,11 light industry level, criteria A |  |           |           |
|              | MTBF   | 217.4K HRS Compliance: MIL-HDBK-217F   |  |           |           |
|              | Dimension (L*W*H)(mm)  | 62.85x50x19.7  |  |           |           |
| Note         | Packing  | 0.033kg ; 144Pcs/7.05kg  |  |           |           |
|              | 1. All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature.  |  |  |           |           |
|              | 2. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47 uf parallel capacitor.                                  |  |  |           |           |
|              | 3. Tolerance: includes set up tolerance, line regulation and load regulation.  |  |  |           |           |
|              | 4. Line regulation is measured from low line to high line at rated load.   |  |  |           |           |
|              | 5. Load regulation is measured from 10% to 100% rated load.  |  |  |           |           |
|              | 6. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. |  |  |           |           |
|              | 7. Length of set up time is measured at cold first start. Turning ON/OFF the power supply very quickly may lead to increase of the set up time                             |  |  |           |           |
|              | 8. The line regulation and load regulation is calculated based on output voltage.  |  |  |           |           |

Unit : mm

## ■ Mechanical Specification

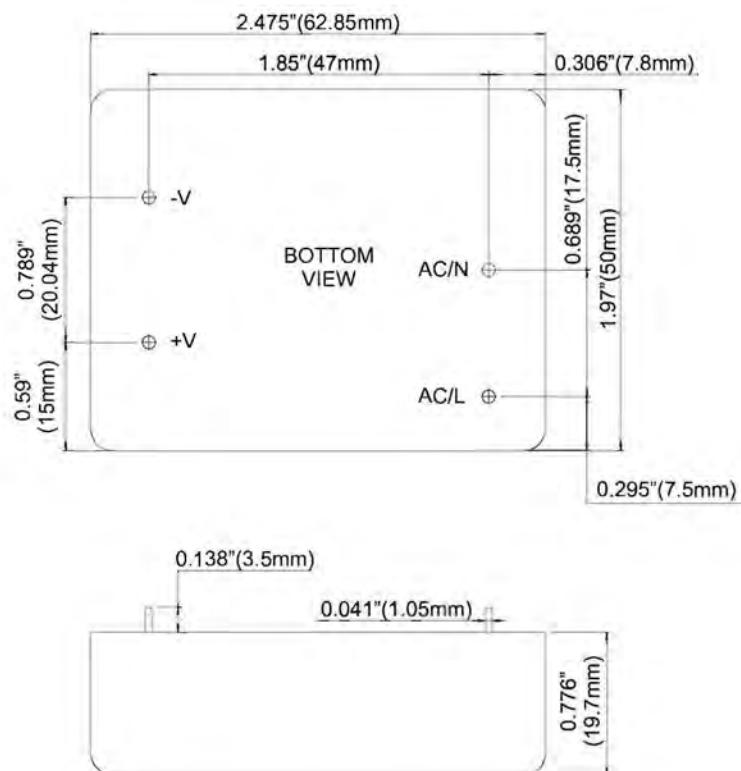

## ■ Block Diagram

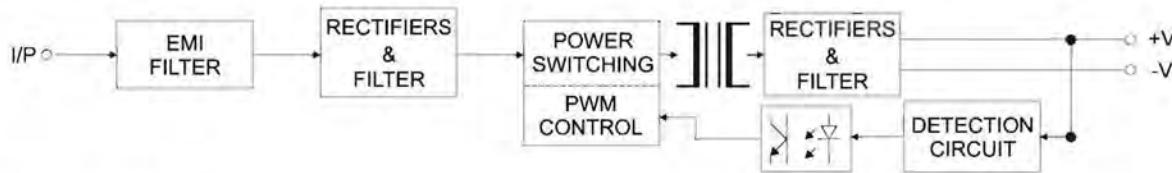

## ■ De-rating Curve

