

# INSTRUCTION MANUAL




**KEPCO** An ISO 9001 Company.

**KIT  
DIN FMP/FCP  
-3P, -10P**

## DIN-RAIL MOUNTING KIT FOR SERIES FMP/FCP 3W, 10W

**DESCRIPTION.** Kepco Kits, Models DIN FMP/FCP -3P and -10P each contain a preassembled mounting bracket with two mounting clips and associated hardware used to install FMP and FCP Series power supplies on a DIN rail. The -3 suffix is for the 3 Watt Series, the -10 suffix is for the 10 Watt Series. The "P" suffix is for mounting the power supply perpendicular to the DIN rail as shown in Figure 1. Outline dimensions are shown in Figure 4.



3041899


**FIGURE 1. P SUFFIX ORIENTATION**

**TABLE 1. COMPONENTS SUPPLIED**

KIT MODEL NO.	MOUNTING BRACKET PART NO.	CLIP (QTY 2) PART NO.	SCREW (QTY 2) PART NO.	WASHER (QTY 2) PART NO.
DIN FMP/FCP-3P	128-2052	108-0366	101-0092 (4-40 X 0.312 BHPH)	103-0097 (NO. 4, SPLIT, LOCK)
DIN FMP/FCP-10P	128-1988	108-0366	101-0092 (4-40 X 0.312 BHPH)	103-0097 (NO. 4, SPLIT, LOCK)

### INSTALLATION

- INSTALL MOUNTING BRACKET.** Attach the mounting bracket to the power supply using hardware supplied (see Figure 2).
- INSTALL POWER SUPPLY ON DIN RAIL.** To mount the power supply on the rail insert one end of both clips under one edge of the rail, then snap the other end of the two clips into place (see Figure 3A).

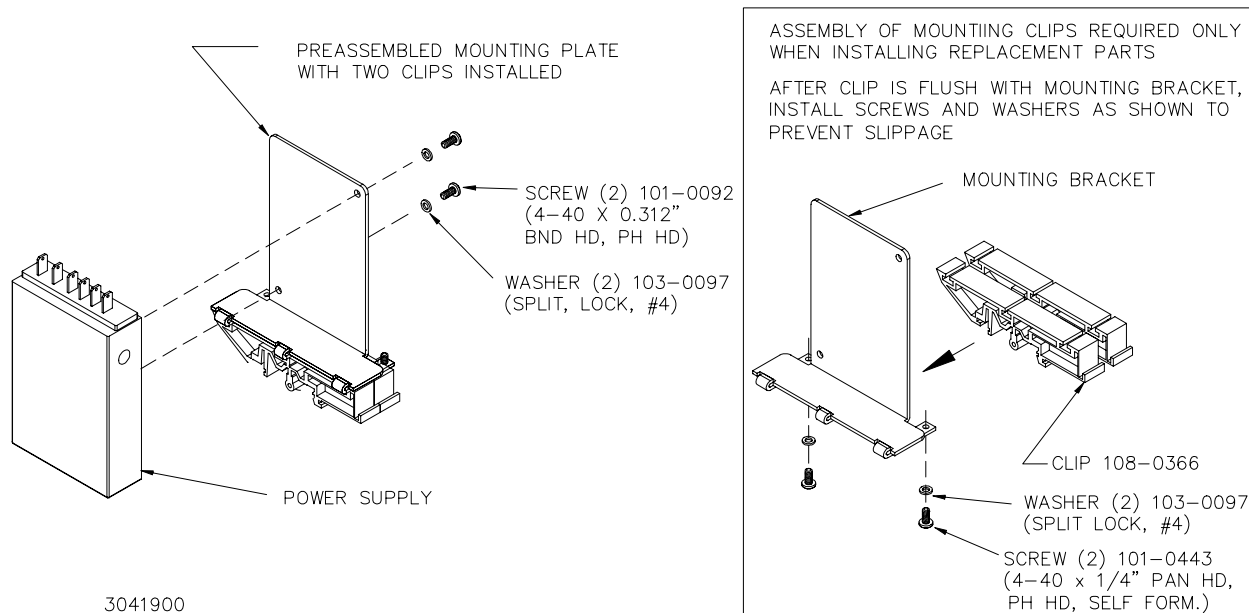


3041900


**FIGURE 2. INSTALLING MOUNTING PLATE ON POWER SUPPLY**

KEPCO, INC. ● 131-38 SANFORD AVENUE ● FLUSHING, NY. 11352 U.S.A. ● TEL (718) 461-7000 ● FAX (718) 767-1102  
<http://www.kepcopower.com> ● email: [hq@kepcopower.com](mailto:hq@kepcopower.com)

**REMOVING POWER SUPPLY FROM DIN RAIL.** While grasping the power supply with one hand, Insert a screwdriver into the access holes provided and apply leverage towards the left as shown in Figure 3B to disengage each clip from the rail. Since mounting clips are close together, it may be necessary to apply leverage with two screwdrivers simultaneously.

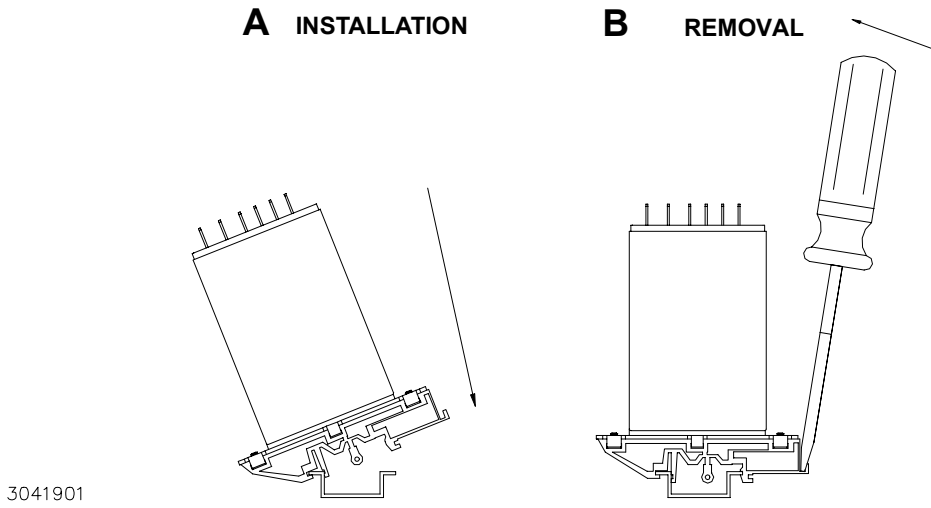

**FIGURE 3. INSTALLATION AND REMOVAL OF POWER SUPPLY FROM DIN RAIL**

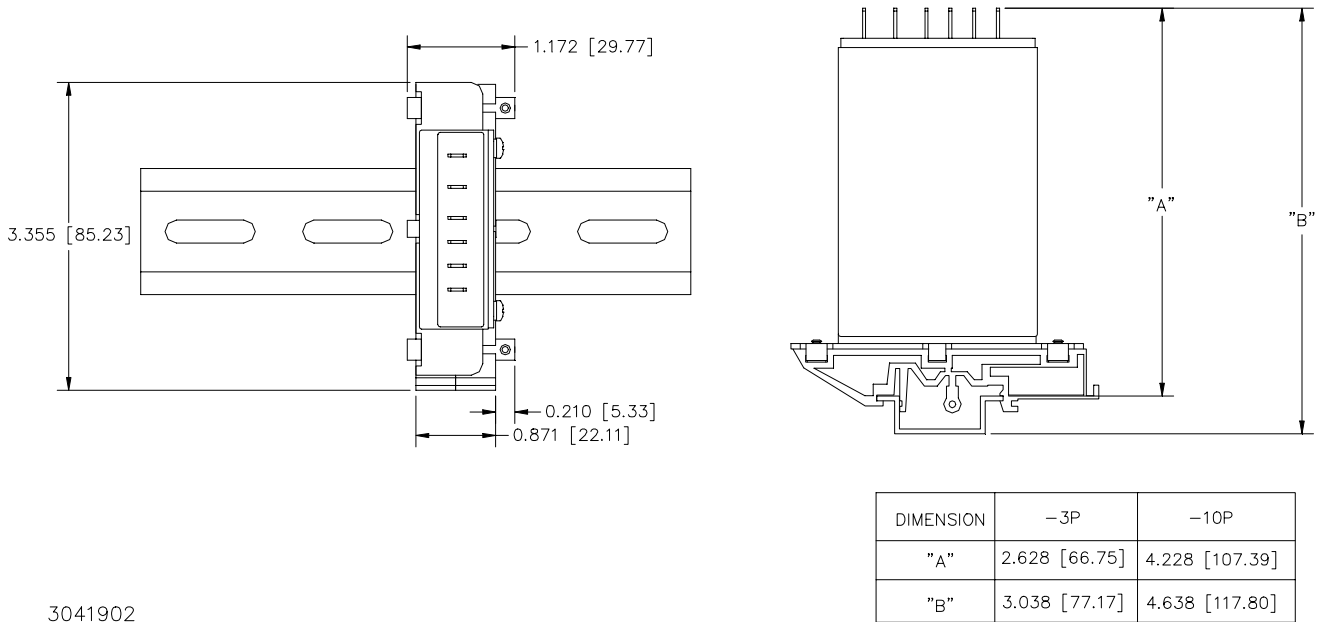

**FIGURE 4. OUTLINE DRAWING**