

INSTRUCTION MANUAL



KEPCO An ISO 9001 Company.

**KIT
DIN KRW-P**

DIN-RAIL MOUNTING KIT FOR KRW 350KV, KRW 351 KV

DESCRIPTION. Kepco KIT, Models DIN KRW-P contains a cover, a cable kit, a mounting bracket with left and right preassembled mounting clips and associated hardware used to install KRW 350KV (+5V, ±12V) and KRW 351KV (+5V, ±15V) power supplies on a DIN rail. The "P" suffix is for mounting the power supply perpendicular to the DIN rail as shown in Figure 1. Outline Dimensions are shown in Figure 5

3042758

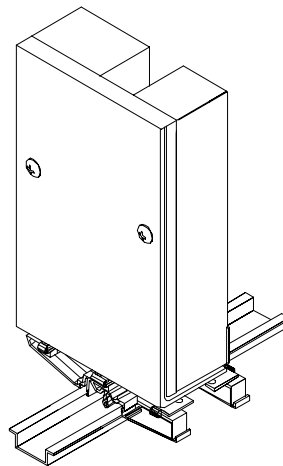


FIGURE 1. P SUFFIX ORIENTATION

TABLE 1. COMPONENTS SUPPLIED

CABLE KIT PART NO.	COVER PART NO.	MOUNTING BRACKET PART NO.	SCREW (QTY 2) (Power Supply To Mounting Bracket) PART NO.	WASHER (QTY 2) (Power Supply To Mounting Bracket) PART NO.	CLIP (QTY 2) PART NO.	CLIP PLATE (QTY 2) PART NO.	SCREW Thread-form (QTY 4) (Clip To Mounting Bracket) PART NO.	WASHER (QTY 4) (Clip To Mounting Bracket) PART NO.
219-0242	CA 29	128-2058	101-0383 (8-32 X 3/16 PHPH)	103-0017 (NO. 8, INT. TOOTH)	108-0366	128-1971	101-0443 (4-40 X 1/4 BHPH)	103-0014 (NO. 4, INT. TOOTH)

INSTALLATION

1. **INSTALL COVER.** Attach the cover to the power supply per instruction manual supplied with the cover.
2. **INSTALL MOUNTING BRACKET.** Attach the mounting bracket to the power supply using the hardware supplied (see Figure 2).

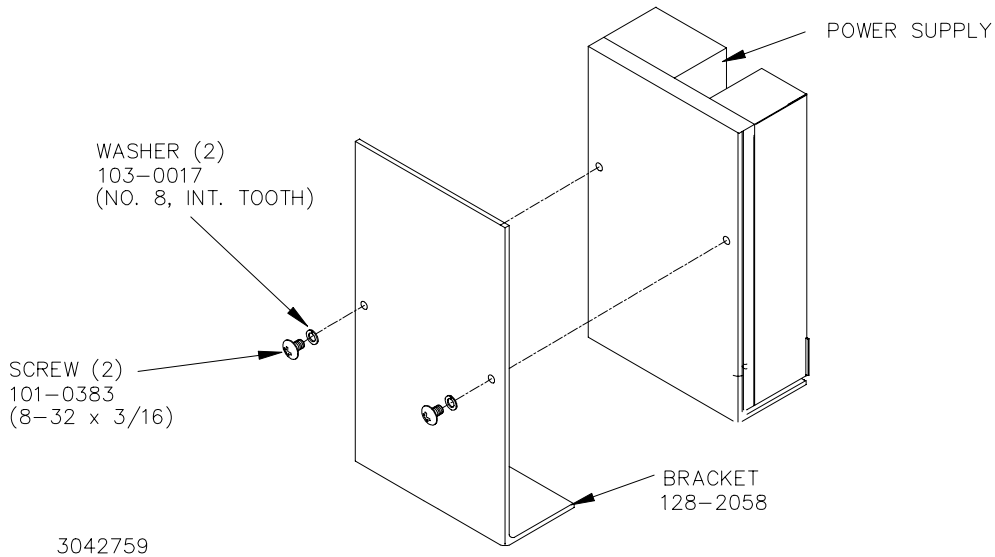


FIGURE 2. INSTALLING MOUNTING BRACKET ON POWER SUPPLY

3. **INSTALL CLIPS.** Attach preassembled mounting clips into the mounting bracket holes using hardware supplied (see Figure 3).


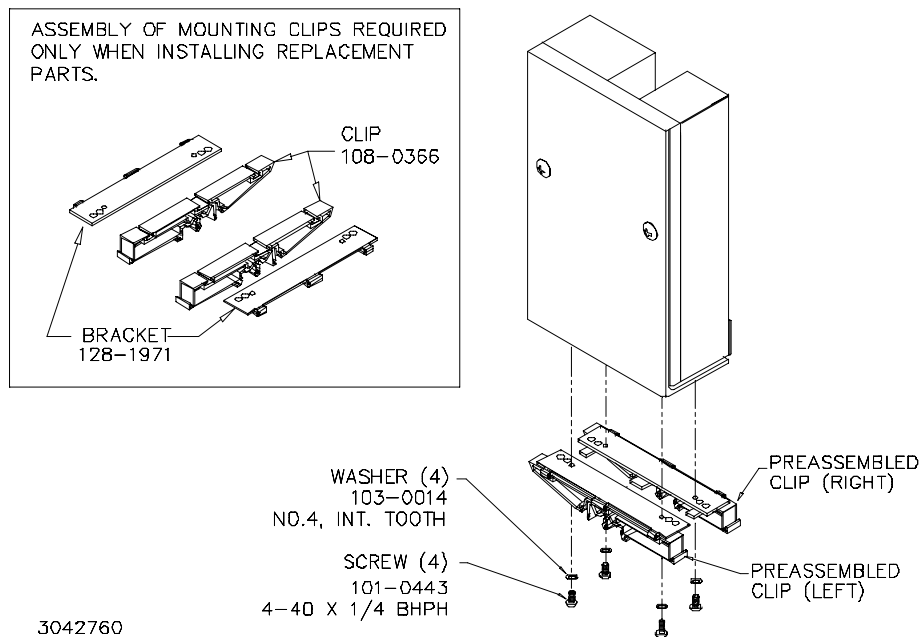


FIGURE 3. INSTALLING CLIPS ON MOUNTING BRACKET


4. **INSTALL CABLE KIT.** Attach wires to the power supply per Instruction Sheet supplied with cable kit.
5. **INSTALL POWER SUPPLY ON DIN RAIL.** To mount the power supply on the rail insert one end of both mounting clips under one edge of the rail, then snap the other end of the two clips into place (see Figure 4A).

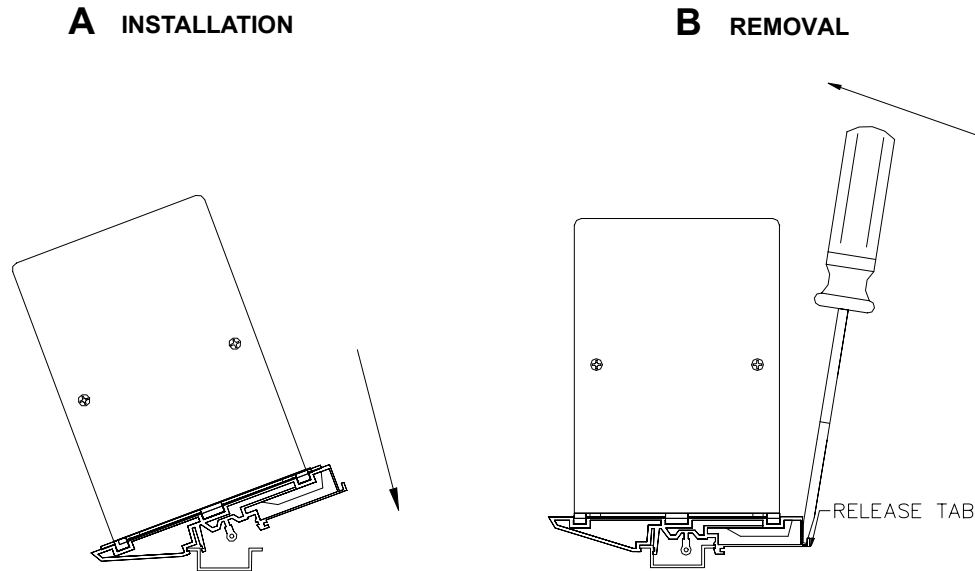

3042761

FIGURE 4. INSTALLATION AND REMOVAL OF POWER SUPPLY FROM DIN RAIL

REMOVING POWER SUPPLY FROM DIN RAIL. While grasping the power supply with one hand, Insert a screwdriver into the access holes provided and apply leverage towards the left as shown in Figure 4B to disengage each clip from the rail. Where mounting clips are close together, it may be necessary to apply leverage with two screwdrivers simultaneously.

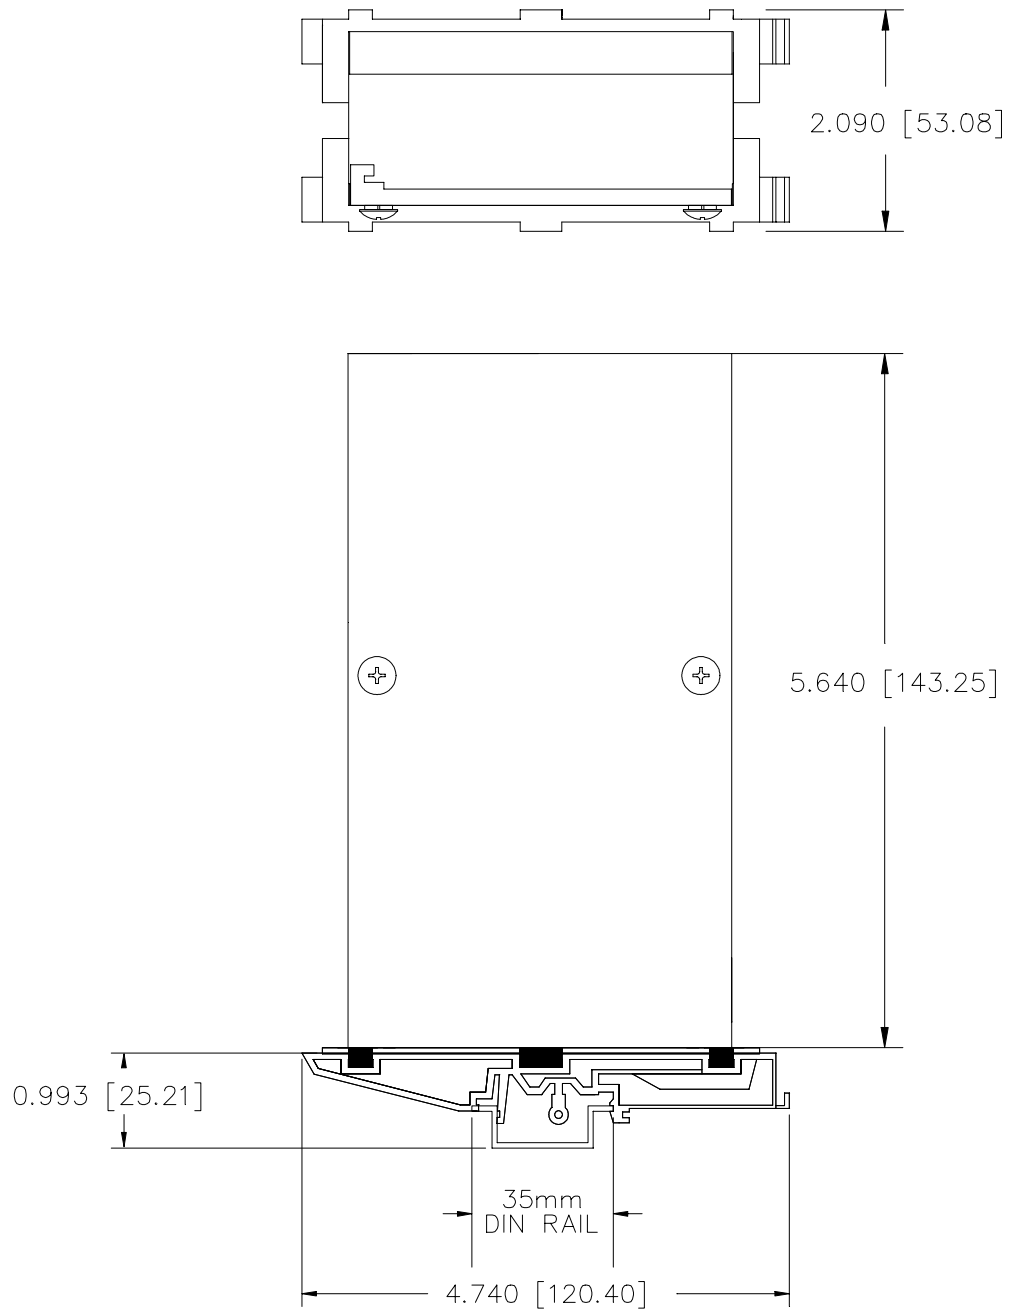

NOTE:

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES,
DIMENSIONS IN BRACKETS ARE IN MILLIMETERS.

3042762

FIGURE 5. MRW 35W/50W/65W POWER SUPPLY WITH KIT INSTALLED, OUTLINE DIMENSIONS