

INSTRUCTION MANUAL




KEPCO An ISO 9001 Company.

**KIT
DIN RKW
-150L**

DIN-RAIL MOUNTING KIT FOR SERIES RKW 150W

DESCRIPTION. Kepco KIT, Model DIN RKW-150L contains two preassembled mounting clips and associated hardware used to install RKW 150 Watt Series power supplies on a DIN rail. The -150 suffix is for the 150 Watt Series. The "L" suffix is for mounting along the long dimension (length) as shown in Figure 1. Outline dimensions are shown in Figure 4

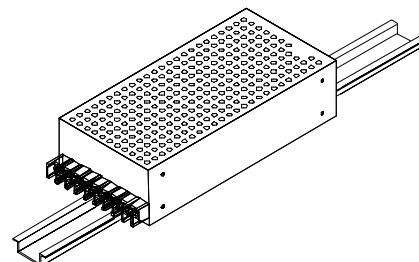

3041758

FIGURE 1. L SUFFIX ORIENTATION

TABLE 1. COMPONENTS SUPPLIED

KIT MODEL NO.	COVER PART NO.	MOUNTING PLATE PART NO.	CLIP (QTY 2) PART NO.	SCREW (QTY 4) PART NO.	WASHER (QTY 4) PART NO.
DIN RKW-150L	CA 36	128-1938	108-0362	501-0075 (M4 X 8 FLPH)	103-0017 (NO. 8, INT. TOOTH)


INSTALL COVER. Attach the cover to the power supply per instruction manual supplied with the cover.

INSTALLING KIT. Attach the preassembled mounting clips to the power supply using the hardware supplied (see Figure 3). The clips may be mounted with the release lever on either side to facilitate removal.

INSTALLING POWER SUPPLY ON DIN RAIL. To mount the power supply on the rail insert one end of both clamps under one edge of the rail, then snap the other end of the two clips into place (see Figure 2A).

REMOVING POWER SUPPLY FROM DIN RAIL. While grasping the power supply with one hand, use a screwdriver to apply leverage towards the left as shown in Figure 2B to disengage each clip from the rail. Where mounting clips are close together, it may be necessary to apply leverage with two screwdrivers simultaneously.

A — INSTALLATION

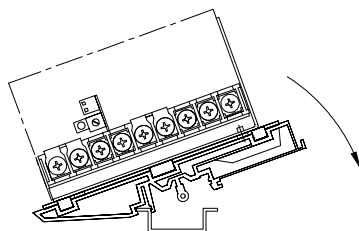

3041760

B — REMOVAL



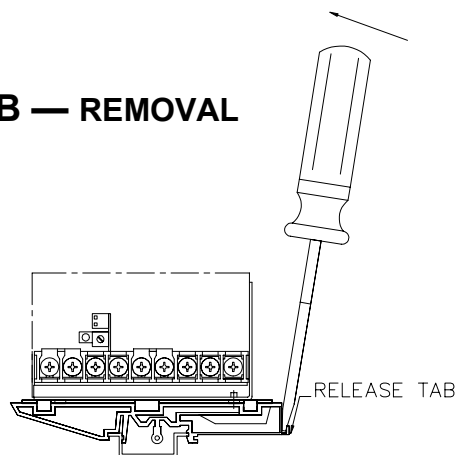




FIGURE 2. INSTALLATION AND REMOVAL OF POWER SUPPLY FROM DIN RAIL

KEPCO, INC. ● 131-38 SANFORD AVENUE ● FLUSHING, NY. 11352 U.S.A. ● TEL (718) 461-7000 ● FAX (718) 767-1102
<http://www.kepcopower.com> ● email: hq@kepcopower.com

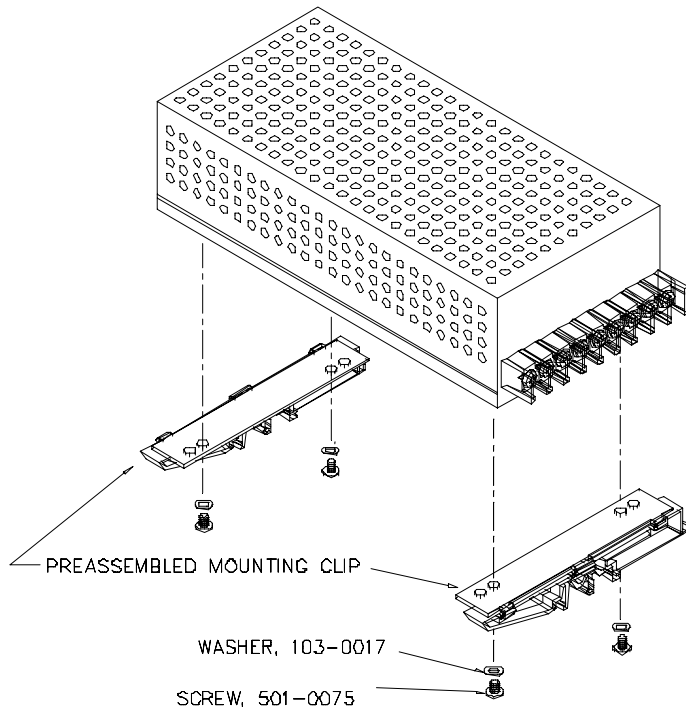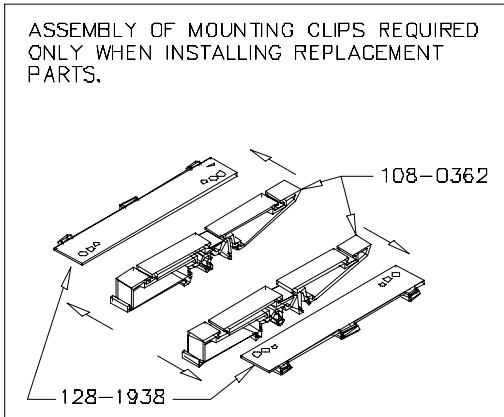

3042597

FIGURE 3. INSTALLATION OF KIT ON RKW POWER SUPPLY

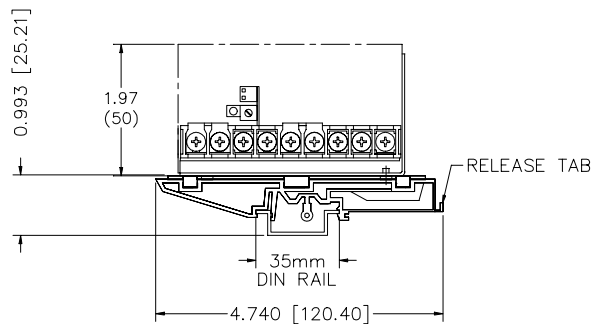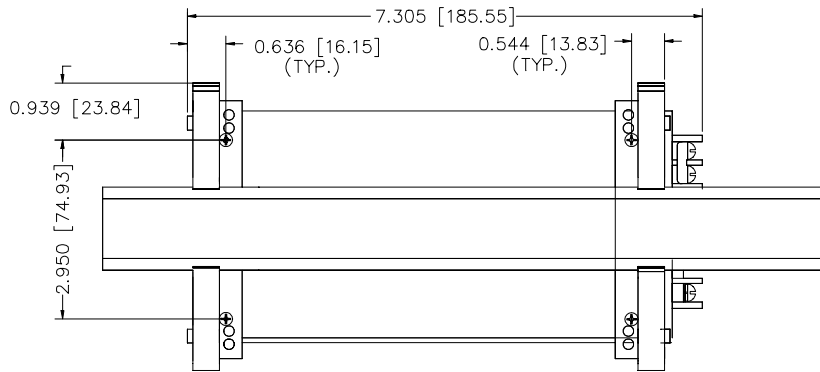

3042598

FIGURE 4. RKW 100W, 150W POWER SUPPLY WITH KIT INSTALLED, OUTLINE DIMENSIONS